

CDM6010

MINI EXCAVATOR



■ **OPERATING WEIGHT:** (METRIC / IMPERIAL)

1010kg/ 2227 lbs

■ **ENGINE POWER:** (METRIC / IMPERIAL)

10.2kW/13.68hp

■ **BUCKET CAPACITY:** (METRIC / IMPERIAL)

0.022m³/0.777cu ft

■ **TRAVEL SPEED:** (METRIC / IMPERIAL)

1.6/3.1km/h/0.99/1.93mile/h

LONKING (FUJIAN) INTERNATIONAL TRADE CO.,LTD.

ADD: 26 MINYI ROAD, XINQIAO, SONGJIANG INDUSTRIAL ZONE, SHANGHAI
E-MAIL: EXPORT@LONKING.CN HTTP: //WWW.LONKINGGROUP.COM TEL: +86-21-3760 2000

SPECIFICATIONS



TECHNICAL PARAMETERS

ITEM		UNIT	CDM6010
BASIC	OPERATING WEIGHT	kg	1010
	STANDARD BUCKET CAPACITY	m ³	0.022
	STANDARD BUCKET WIDTH	mm	320
	MAX.TRAVEL SPEED	km/h	1.6/3.1
	MAX.SWING SPEED	rpm	10.5
	GRADE ABILITY	°	30
	GROUND PRESSURE	kPa	24.5
	BOOM SWING ANGLE (L/R)	°	73/53
	MAX.TRACTION FORCE	KN	10
ENGINE	ENGINE BRAND		Kubota
	ENGINE MODEL		D722
	RATED POWER	kW/rpm	10.2/2500
	DISPLACEMENT	L	0.57
	FUEL TANK	L	9.4
HYDRAULIC	MAX.FLOW(TOTAL)	L/min	2×10.8+8.5
	MAX.WORKING PRESSURE	MPa	18
	MAX.PILOT PRESSURE	MPa	3.2
	MAX.ARM DIGGING FORCE	kN	5.9
	MAX.BUCKET DIGGING FORCE	kN	10.4
	HYDRAULIC OIL TANK	L	9.5
CHASSIS	TRACK WIDTH	mm	180
	TRACK TYPE		Rubber crawler
	CARRIER ROLLERS NUMBER		1(each side)
	TRACK ROLLERS NUMBER		2(each side)
ELECTRIC	SYSTEM VOLLAGE	V	1'1"
	BATTERY CAPACITY	V,Ah	9'4"

PRODUCT FEATURES

Yanmar Strong Power Engine.Emission level reaches EU Stage V . Trustworthy on compact equipment, this engine features low noise, low vibration, and easy maintenances for main parts.

Telescopic chassis controlled by simple single joystick, the chassis width can be retracted to 750mm to adapt to narrow spaces. On the contrary, the chassis width can be extended to 1000mm to improve the stability by 15% and even allow the use of hydraulic breaking hammer.

The hydraulic pilot control is firstly applied for the working device, featuring better accuracy and smoothness.

3 hoisting points are provided for direct hoisting and ensure easy loading and unloading, featuring high safety and simplicity.

The tiltable engine hood allows the exposure of most engine area to ease the repairs.

STANDARD EQUIPMENT

Tops canopy

Safety seat belt

Telescopic chassis

Hydraulic pilot control rod

Deflectable boom

Warning light

External centralized pressing gauge

OPTIONAL




Quick change device

Narrow bucket

Widened bucket

Tops canopy

TECHNICAL PARAMETERS

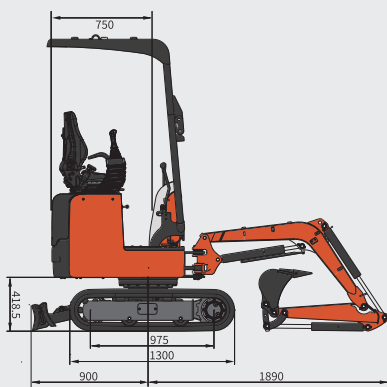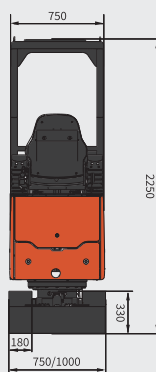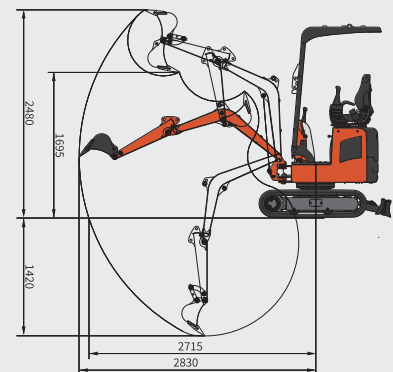

THE FOLLOWING BLANK CAN BE USED FOR NOTES OR COMMENTS

FOR MORE INFORMATION ON LONKING PRODUCTS
PLEASE CONTACT OUR LOCAL AGENT